


| REV | DATE | DESCRIPTION | DRAWN |
|-----|------|-------------|-------|
| | | | |
| | | | |



NOTE:
1.N MALE CRIMP
CENTER PIN GOLD PLATING 3μ THICK OVER NICKEL STRIKE
BODY NICKEL PLATING 70μ THICK OVER NICKEL STRIKE
BRASS AND PTFE PER SGS
FINISH PLATING THICKNESS IN MICRO-INCHES
COPPER PARTS AUTOMATIC CNC MANUFACTURING
2.RP TNC MALE CRIMP
CENTER PIN GOLD PLATING 1.5μ THICK OVER NICKEL STRIKE
BODY NICKEL PLATING 70μ THICK OVER NICKEL STRIKE
BRASS AND PTFE PER SGS
FINISH PLATING THICKNESS IN MICRO-INCHES
COPPER PARTS AUTOMATIC CNC MANUFACTURING
3.LOW LOSS 200 COAXIAL CABLE/3D
ATTENUATION : 0.32dB/m@900MHz 0.42dB/m@1800MHz 0.61dB/m@3000MHz
CONDUCTOR : BARE COPPER WIRE/Ø1.12mm
INSULATION : GAS-FPE/Ø2.95mm
TAPE : BONDED ALUMINUM FOIL
SHIELD : TINNED COPPER WARE/16*4*0.10mm/59% COVERAGE
JACKET : PVC/Ø4.95mm

Prohibit re-circulating

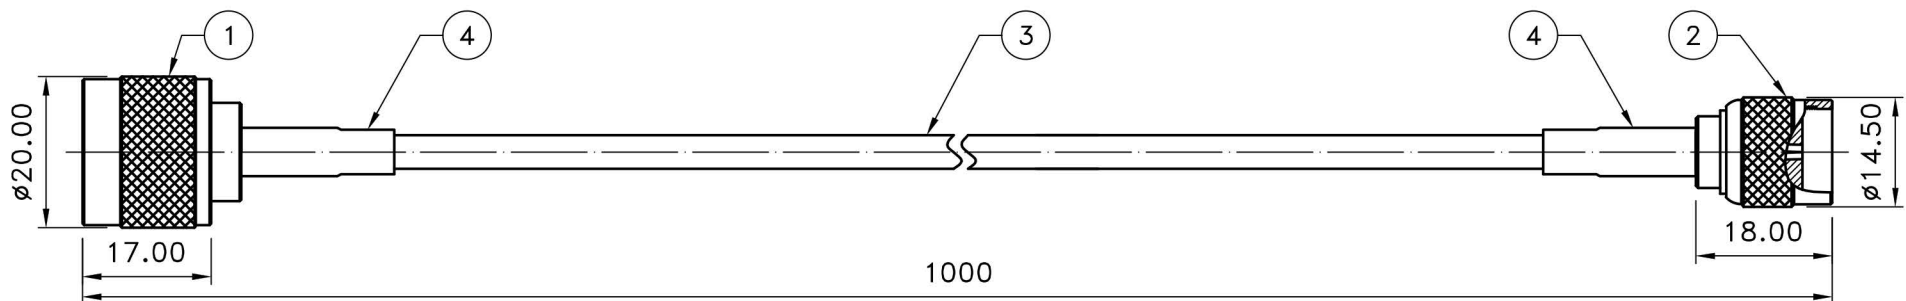

| 4 | D0176 (SHRINK TUBE) | PE | BLACK | 2 |
|----|----------------------|----------|--------|------|
| 3 | LLC200 | ASSY | BLACK | 1 |
| 2 | TNC-1501-4-F2-RP-TGN | BRASS | NICKEL | 1 |
| 1 | N-1101-4-F2-TGN | BRASS | NICKEL | 1 |
| NO | DESCRIPTION | MATERIAL | FINISH | Q'ty |

| NOTE | DIMENSION |
|--|--|
| 1.STRIP ALL BURRS. 2.ALL DIMENSIONS ARE AFTER PLATING. 3.DIAMETERS ON COMMON CENTERS. TO BE CONCENTRIC WITHIN 0.1 T.I.R 4.CHAMFER 1ST & LAST THREADS 45° 5.BREAK ALL CONNERS & EDGES CO.15 MAX. | UNLESS OTHERWISE NOTED TOLERANCES 0.X=±0.2 0.XX=±0.1 CABLE LENGTH: L ≥10000=+50 1000≤L<10000=+30 L<1000=+8 |

| | |
|---------------------------------|------------------------|
| WIFI-Link™ 台灣崑海尼可 | |
| TITLE N male to RP TNC male | |
| DRAWING NO. np-rtncp-200-1.0 | |
| APPROVED | DRAWN DATE 01/09/12 |
| CHECKED | SCALE 1:1 |
| DRAWN ALICE | UNIT mm |