


REV	DATE	DESCRIPTION	DRAWN

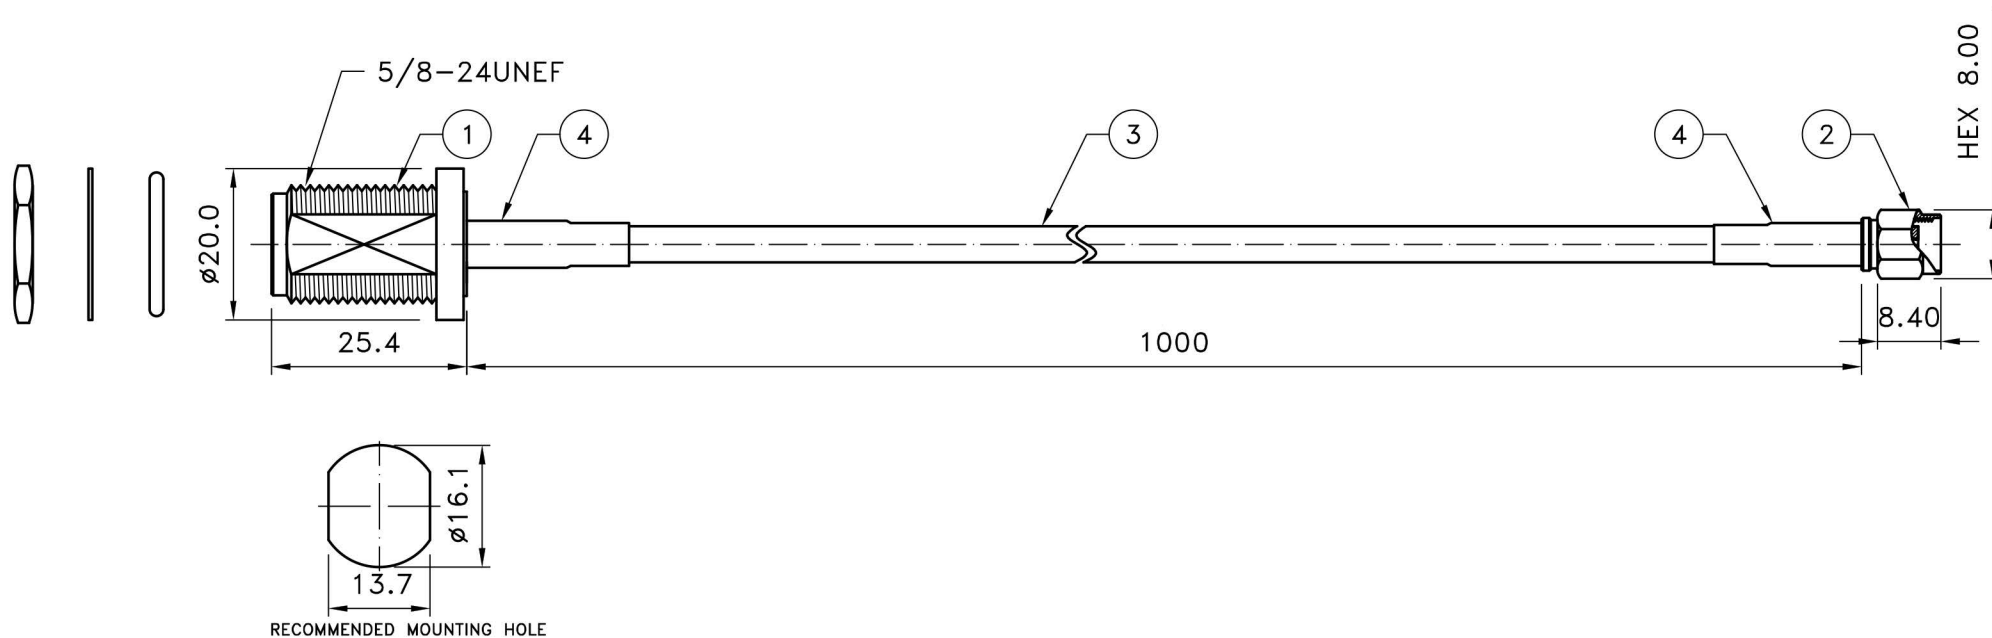

NOTE:

1.N FEMALE BULKHEAD CRIMP

CENTER PIN GOLD PLATING 3μ THICK OVER NICKEL STRIKE
 BODY NICKEL PLATING 70μ THICK OVER NICKEL STRIKE
 BRASS AND PTFE PER SGS
 FINISH PLATING THICKNESS IN MICRO-INCHES
 COPPER PARTS AUTOMATIC CNC MANUFACTURING

2.RP SMA MALE CRIMP

CENTER PIN GOLD PLATING 20μ THICK OVER NICKEL STRIKE
 BODY GOLD PLATING 3μ THICK OVER NICKEL STRIKE
 BRASS AND PTFE PER SGS
 PTFE : TOMBO No.9002
 FINISH PLATING THICKNESS IN MICRO-INCHES
 COPPER PARTS AUTOMATIC CNC MANUFACTURING

3.LOW LOSS 200 COAXIAL CABLE/3D

ATTENUATION : 0.32dB/m@900MHZ 0.42dB/m@1800MHZ 0.61dB/m@3000MHZ
 CONDUCTOR : BARE COPPER WIRE/Ø1.12mm
 INSULATION : GAS-FPE/Ø2.95mm
 TAPE : BONDED ALUMINUM FOIL
 SHIELD : TINNED COPPER WARE/16*4*0.10mm/59% COVERAGE
 JACKET : PVC/Ø4.95mm

4	D0176 (SHRINK TUBE)	PE	BLACK	2
3	LLC200	ASSY	BLACK	1
2	SMA-1001-10-F2-RP-TGG	BRASS	GOLD	1
1	N-1112-24-F2-TGN	BRASS	NICKEL	1
NO	DESCRIPTION	MATERIAL	FINISH	Q'ty

Prohibit re-circulating

RoHS
COMPLIANT

NOTE	DIMENSION
1.STRIP ALL BURRS. 2.ALL DIMENSIONS ARE AFTER PLATING. 3.DIAMETERS ON COMMON CENTERS. TO BE CONCENTRIC WITHIN 0.1 T.I.R 4.CHAMFER 1ST & LAST THREADS 45° 5.BREAK ALL CONNERS & EDGES CO.15 MAX.	UNLESS OTHERWISE NOTED TOLERANCES 0.X=±0.2 0.XX=±0.1 CABLE LENGTH: L≥10000=+50 1000≤L<10000=+30 L<1000=+8 0

 WIFI-Link™ 台灣崑海尼可	
TITLE N female BKD to RP SMA male	
DRAWING NO. njb-rsmap-200-1.0	
APPROVED	DRAWN DATE 07/06/17
CHECKED	SCALE 1:1
DRAWN ALICE	UNIT mm