


REV	DATE	DESCRIPTION	DRAWN

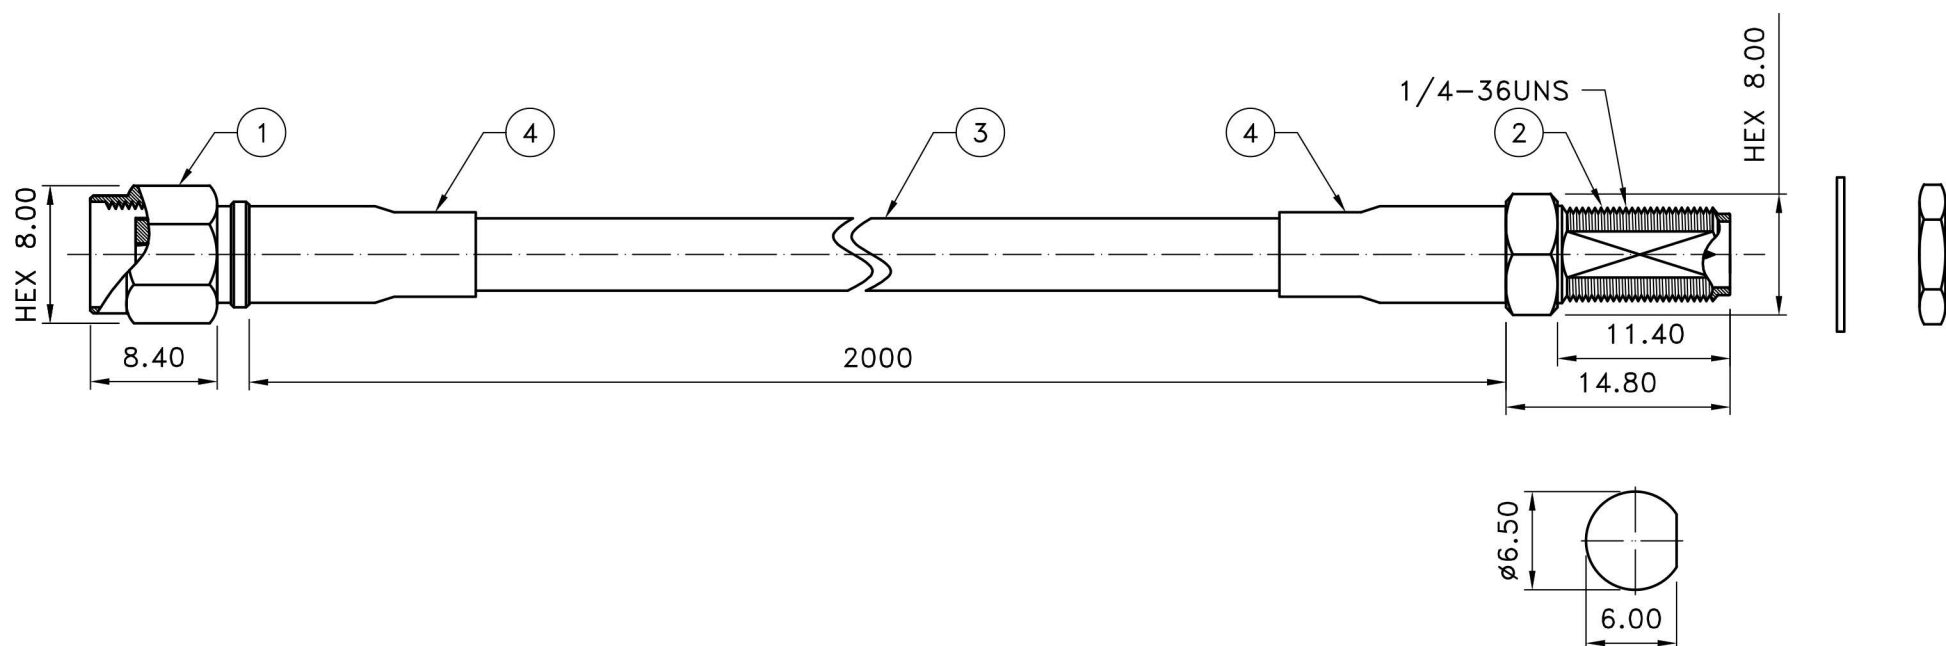

RECOMMENDED MOUNTING HOLE

NOTE:


1.RP SMA MALE CRIMP
 CENTER PIN GOLD PLATING 20μ THICK OVER NICKEL STRIKE
 BODY GOLD PLATING 3μ THICK OVER NICKEL STRIKE
 BRASS AND PTFE PER SGS
 PTFE : TOMBO No.9002
 FINISH PLATING THICKNESS IN MICRO-INCHES
 COPPER PARTS AUTOMATIC CNC MANUFACTURING

2.RP SMA FEMALE BULKHEAD CRIMP
 CENTER PIN GOLD PLATING 20μ THICK OVER NICKEL STRIKE
 BODY GOLD PLATING 3μ THICK OVER NICKEL STRIKE
 BRASS AND PTFE PER SGS
 PTFE : TOMBO No.9002
 FINISH PLATING THICKNESS IN MICRO-INCHES
 COPPER PARTS AUTOMATIC CNC MANUFACTURING

3.LOW LOSS 200A COAXIAL CABLE/3D
 ATTENUATION : 0.32dB/m@900MHZ 0.42dB/m@1800MHZ 0.61dB/m@3000MHZ
 CONDUCTOR : BARE COPPER WIRE/Ø1.12mm
 INSULATION : GAS-FPE/Ø2.95mm
 TAPE : BONDED ALUMINUM FOIL
 SHIELD : TINNED COPPER WARE/16*4*0.10mm/59% COVERAGE
 JACKET : PVC/Ø4.95mm

Prohibit re-circulating

RoHS
 COMPLIANT



WIFI-Link
 台灣歲海尼可

4	D0176 (SHRINK TUBE)	PE	BLACK	2
3	LLC200	ASSY	BLACK	1
2	WL-SMA-2-BJRP200	BRASS	GOLD	1
1	WL-SMA-1-RP200	BRASS	GOLD	1
NO	DESCRIPTION	MATERIAL	FINISH	Q'ty

NOTE		DIMENSION	
1.STRIPE ALL BURRS. 2.ALL DIMENSIONS ARE AFTER PLATING. 3.DIAMETERS ON COMMON CENTERS. TO BE CONCENTRIC WITHIN 0.1 T.I.R 4.CHAMFER 1ST & LAST THREADS 45° 5.BREAK ALL CONNERS & EDGES CO.15 MAX.		UNLESS OTHERWISE NOTED TOLERANCES 0.X=±0.2 0.XX=±0.1 CABLE LENGTH: L ≥10000=+ ⁵⁰ ₀ 1000≤L<10000=+ ³⁰ ₋₀ L<1000=+ ⁸ ₋₀	
TITLE RP SMA MALE-RP SMA FEMALE		DRAWING NO. RSMAP-RSMAJB-200-2.0	APPROVED
DRAWN DATE 06/22/17		CHECKED	SCALE 2:1
DRAWN ALICE		UNIT mm	